



KK103

Three Thread Carpet Overedging Machine



KARPET KING®

KK103

Three Thread Carpet Overedging Machine

THE KARPET KING 103 OVEREDGING MACHINE, ALSO KNOWN AS A CARPET SERGER OR WHIPPING MACHINE, IS EXTREMELY VERSATILE AND ABLE TO HANDLE THE MANY TYPES OF CARPET THAT ARE NOW BEING PRODUCED FROM BOTH NATURAL AND MAN-MADE FIBRES.

The KK103 has been perfected to sew both external and internal corners (image 2) whilst maintaining the high quality of finish expected by the customer.

Stitching is able to be adjusted to completely cover the top and bottom edges of the carpet (image 1) or can be set to just cover the visible areas. The latter setting is preferred by some customers as this allows the leading edge of the carpet to sit flush with hard floor surfaces and also uses much less yarn which in turn reduces costs.

The KK103 is suitable for overedging the following articles:

- Stair Runners
- Floor Mats
- Carpet Samples
- Train Carpets
- Boat Trimming
- Rugs
- Car Mats
- Auto Trimming
- Caravan Carpets
- Many Others



1. Stitching completely covers the top and bottom edges of the carpet, or can be set to just cover the visible top area.



3. Sewing thickness can range from 5mm to a maximum of 12mm.

From thick carpets to thin (image 3), the KK103 can easily cope, however on some of the extremely thick carpets we recommend that the edges should be bevelled prior to sewing in order to create a neater slimmer edge profile that will also reduce the tripping hazard.

Technical Specification

Stitch Width: 10-14mm
(Other widths available on request)

Stitch Length: 1-10 SPI

Needles: 1

Threads: 3 (2 thread available upon request)


Maximum Sewing Speed: 3000rpm

Maximum Sewing Thickness: 12mm

Power Supply: Various:
110v 1Ph/ 220v 1Ph/ 380-415v 3Ph




1. External edge whipping.

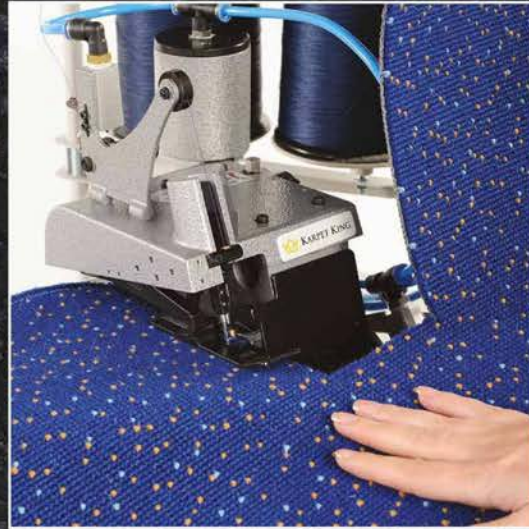

2. Internal corner whipping. (right angles)

- Three thread carpet overedger (whipping machine)
- Capable of serging heavy duty carpets
- Adjustable stitch length control
- Internal corner whipping capability

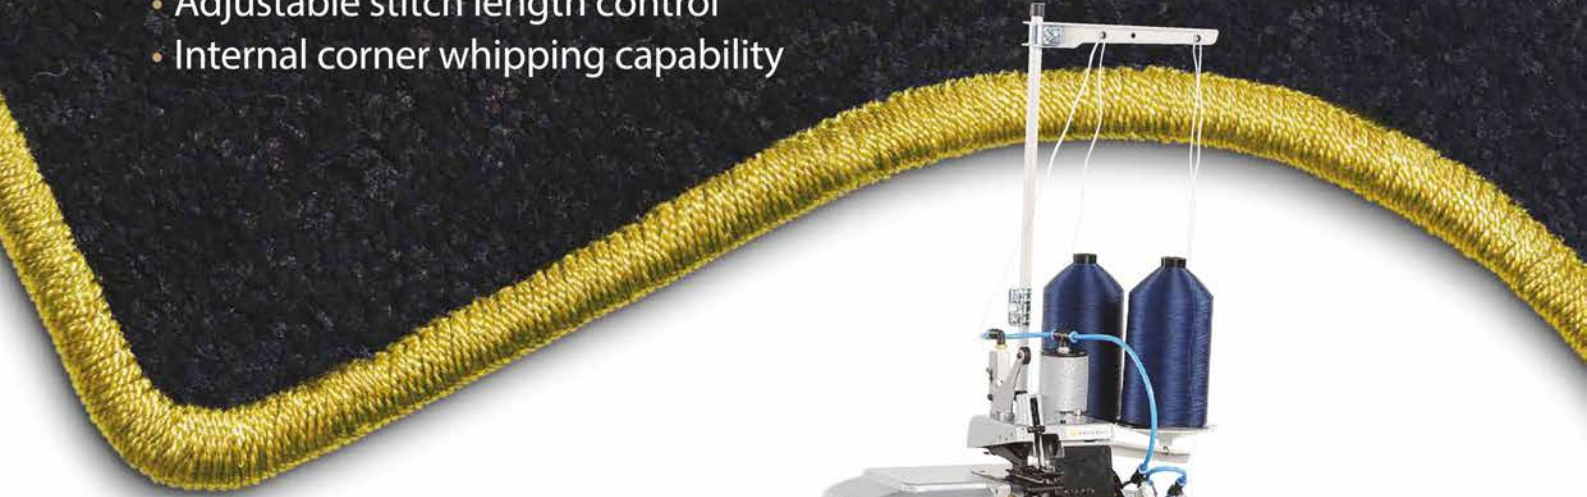

Available with or without a base unit.



1. Carpeting of all types and various thicknesses can be edged to suit all needs.



2. Edging to car mats



3. Turns carpet off-cuts into mats etc.

Technical Specification

Stitch Width: 10-14mm
(Other widths available on request)

Stitch Length: 1-10 SPI

Needles: 1

Threads: 3 (2 thread available upon request)

Maximum Sewing Speed: 1600rpm

Maximum Sewing Thickness: 12mm

Power Supply: Various:
110v 1Ph/ 220v 1Ph/ 380-415v 3Ph

KARPET KING®

New Line Industrial Estate
Bacup,
Lancashire,
England,
OL13 9RW.

T: +44 (0)1706 871933

F: +44 (0)1706 875980

E: info@karpetking.co.uk

W: karpetking.co.uk

A division of Matparts Limited